



Aalborg Universitet

**AALBORG UNIVERSITY**  
DENMARK

## **Experimental analysis of Gas-liquid flow in PEM water electrolysis micro-channels using a permeable wall (poster)**

Lafmejani, Saeed Sadeghi; Olesen, Anders Christian; Al Shakhshir, Saher; Kær, Søren Knudsen

*Publication date:*  
2017

*Document Version*  
Publisher's PDF, also known as Version of record

[Link to publication from Aalborg University](#)

*Citation for published version (APA):*  
Lafmejani, S. S., Olesen, A. C., Al Shakhshir, S., & Kær, S. K. (2017). *Experimental analysis of Gas-liquid flow in PEM water electrolysis micro-channels using a permeable wall (poster)*. Poster presented at International Conference on Electrolysis, Copenhagen, Denmark.

### **General rights**

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal -

### **Take down policy**

If you believe that this document breaches copyright please contact us at [vbn@aub.aau.dk](mailto:vbn@aub.aau.dk) providing details, and we will remove access to the work immediately and investigate your claim.





# Experimental analysis of Gas—liquid flow in PEM water electrolysis micro-channels using a permeable wall



AALBORG UNIVERSITY  
DENMARK

Saeed S. Lafmejani, Anders C. Olesen, Saher A. Shakhshir, Søren Knudsen Kær

Dept. of Energy Technology, Aalborg University, Denmark  
ssl@et.aau.dk

AALBORG UNIVERSITY  
DENMARK

## Introduction

One means of reducing the cost of PEM electrolyser is to increase production from the existing cells by increasing the current density from 1 (A/cm<sup>2</sup>) (at the existing conventional cells) to more than 5 (A/cm<sup>2</sup>). At high current densities, due to high rate of oxygen generation and concentrated heat generation in the cell, issues related to heat and bubble management come up which must get managed.

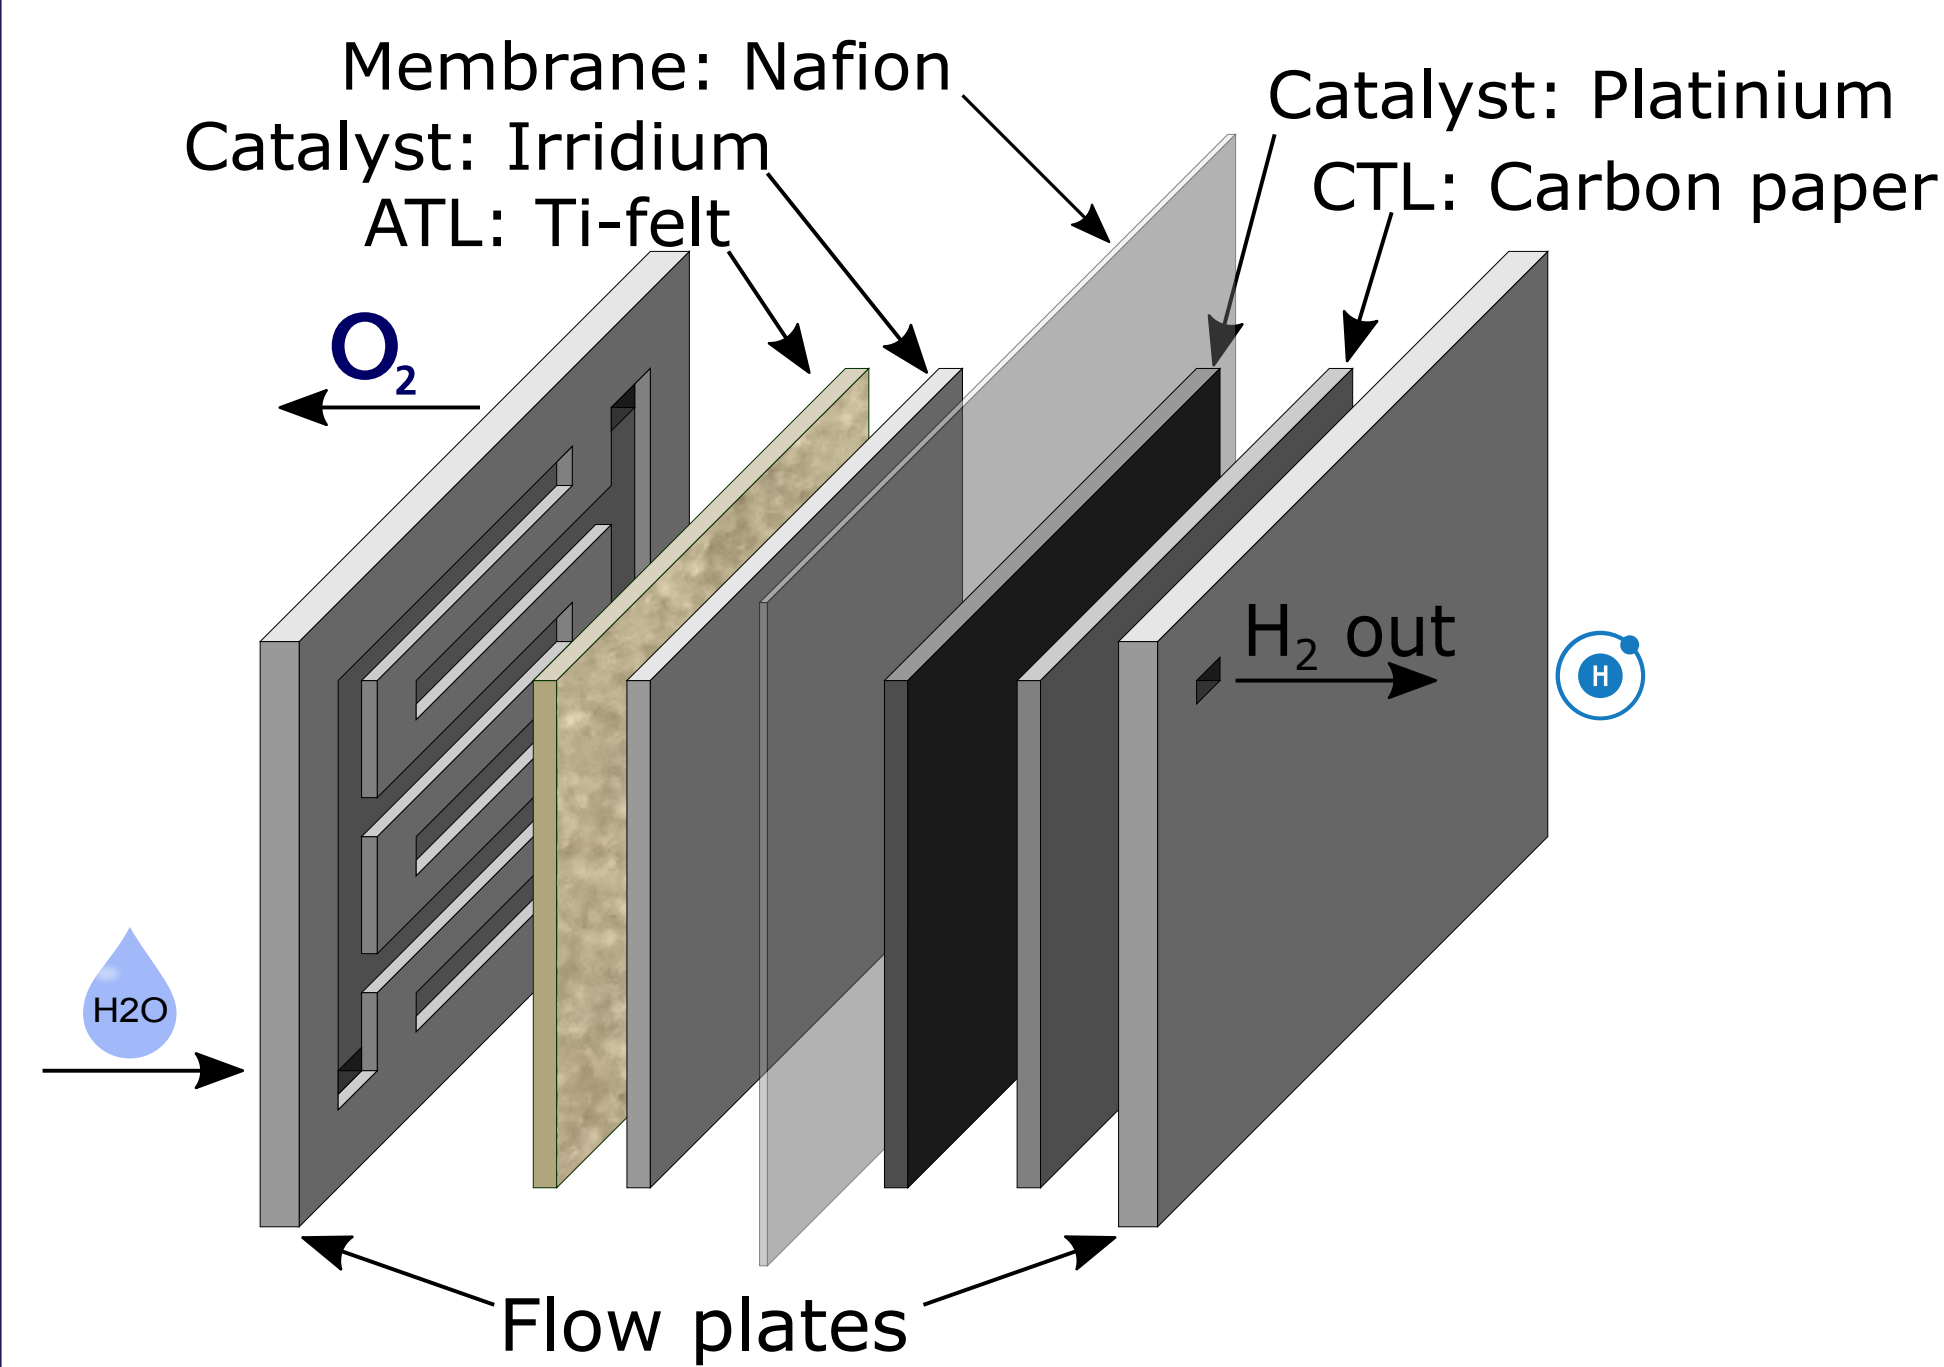


Fig. 1: PEM water electrolysis components

The following figure shows five different flow regimes encounters in micro-channels. According to the literature, channel size, phase superficial velocities, liquid phase surface tension, wall wettability and inlet conditions affect flow pattern. Meanwhile, the channel cross sectional geometry, liquid viscosity and flow orientation respecting the gravity has a lower degree of importance.

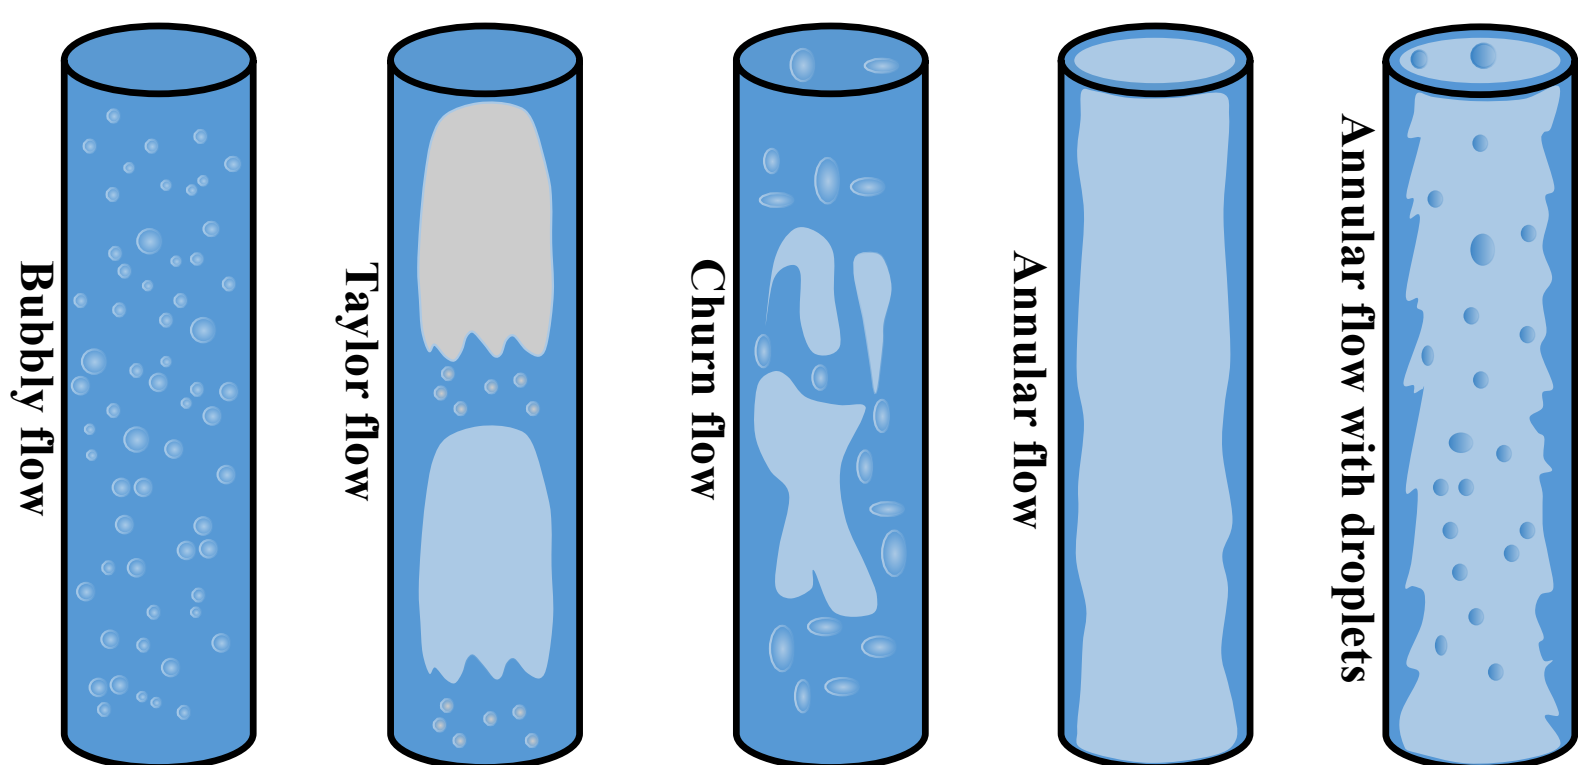


Fig. 2: Gas—Liquid flow regimes in a channel.

## Experimental Setup

In this study, an experimental setup is made of Plexiglas, Titanium-felt and micro-porous ceramic. The setup demonstrates a similar gas-liquid flow encounters in PEM water electrolysis channels and anode porous media.

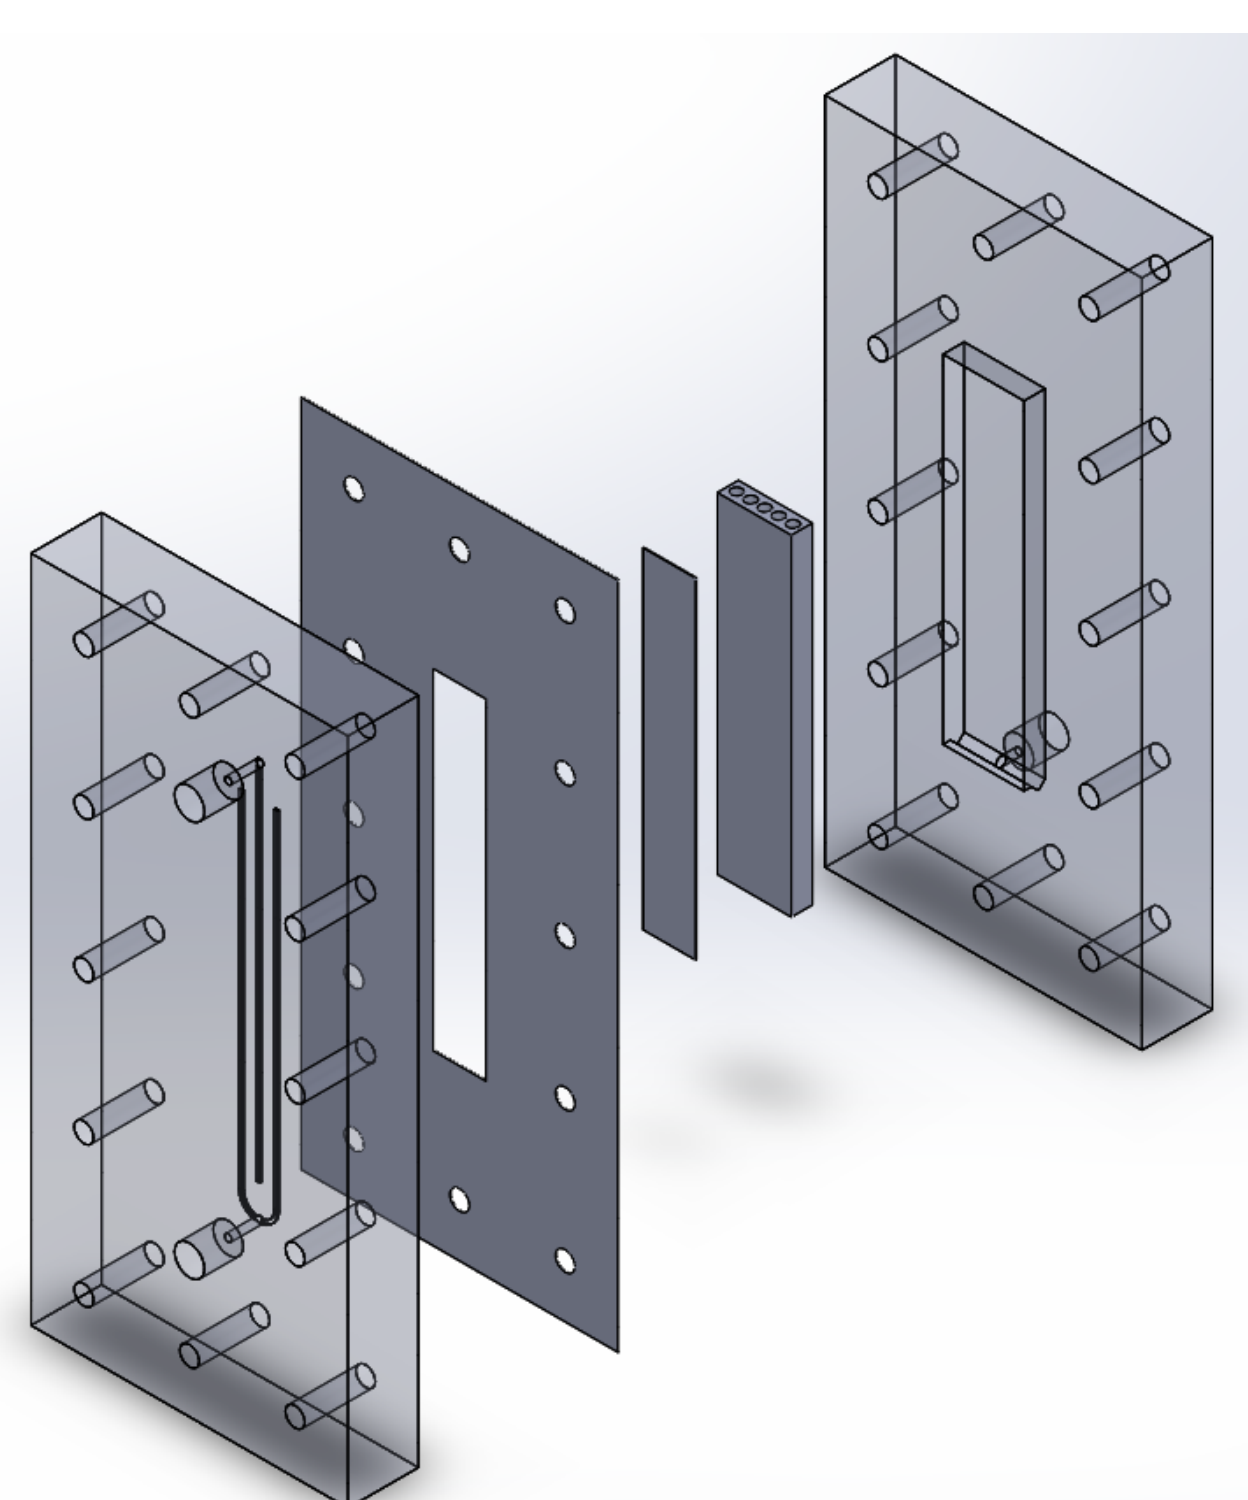


Fig. 3: Experimental setup

## Experimental Setup

The micro-porous ceramic plate simulates generates tiny bubbles simulating the real membrane electrode assembly (MEA). The movement of bubbles upward in the micro-channel at a specific stoichiometric number is analysed and its multiphase flow regime is identified. The channels size is 0.5 x 1 mm.

To take images of the gas—liquid flow, a high-speed AOS camera is set in front of the setup. Two high power LED is used on besides of the camera to bright the view.

The bubbles forms in the channels aren't clearly visible in the raw images. Therefore, a code is written in MATLAB to emphasize the bubble borders based on their movement.

```
vid = VideoReader('exp-1.avi');
mov = read(vid);
implay(mov);
mov2 = diff(mov,1,4);
mov3 = mov2*10;
implay(mov3);
```

## Results

The following figure shows bubbly flow in the entrance channels and annular flow in the outlet channel. Large bubbles in the entrance channel are aligned in a column. They are very close to each other with a film of water in between. However, they don't merge to make a Taylor bubble.

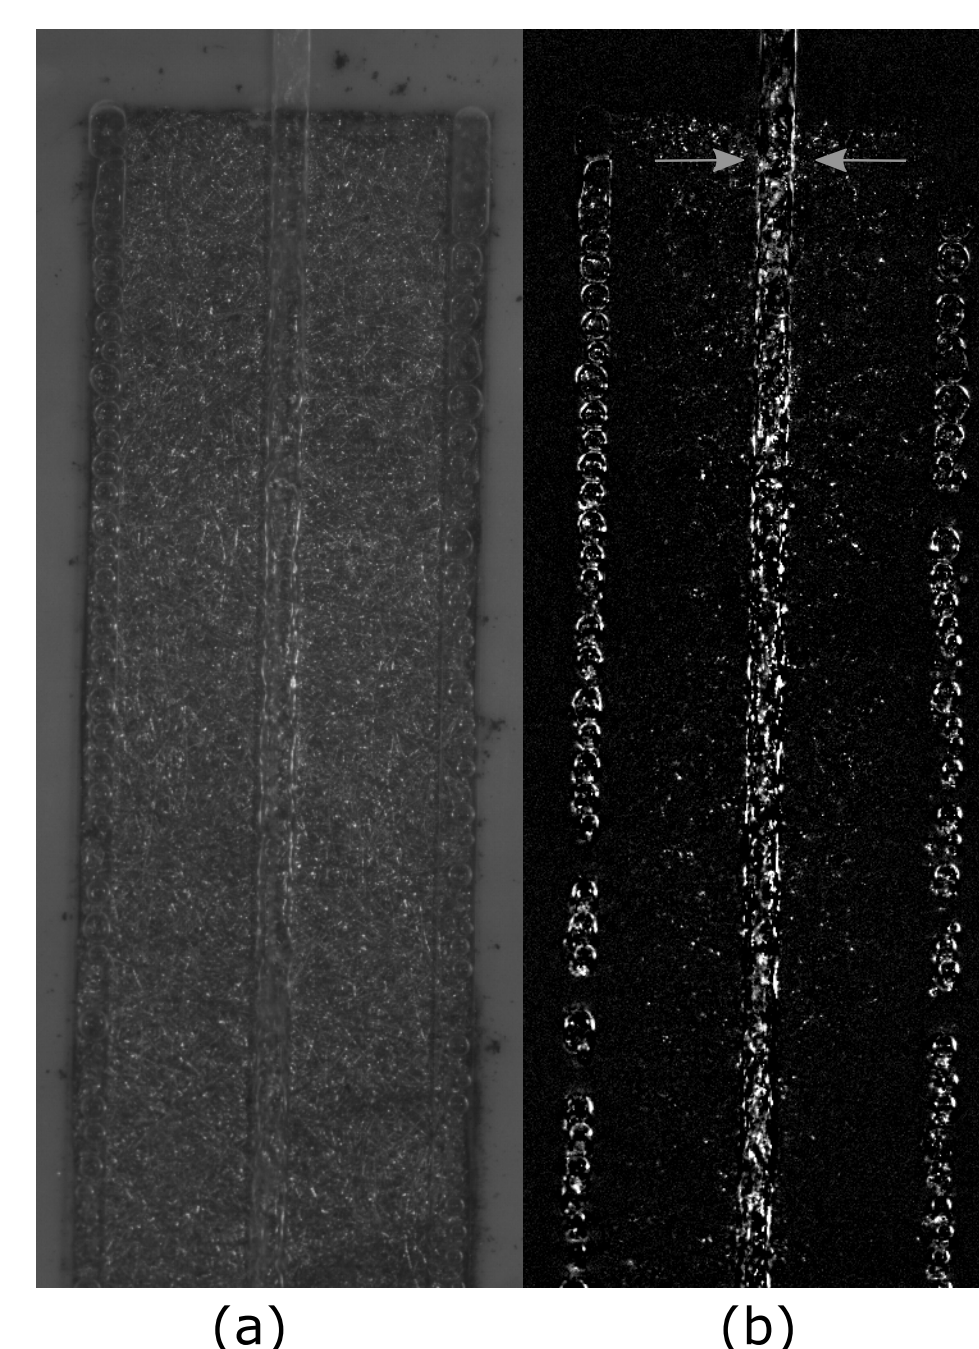


Fig. 4: Bubbly flow in the entrance channels and Annular flow in the outlet channel ( $I=16\text{A/cm}^2$ ,  $St=25$ ).

The following figure shows Taylor flow in the outlet channel. Opposite to the previous figure, as the gas flow rate increases, bubbles merge together, accumulate the whole sectional area and make a Taylor bubble.

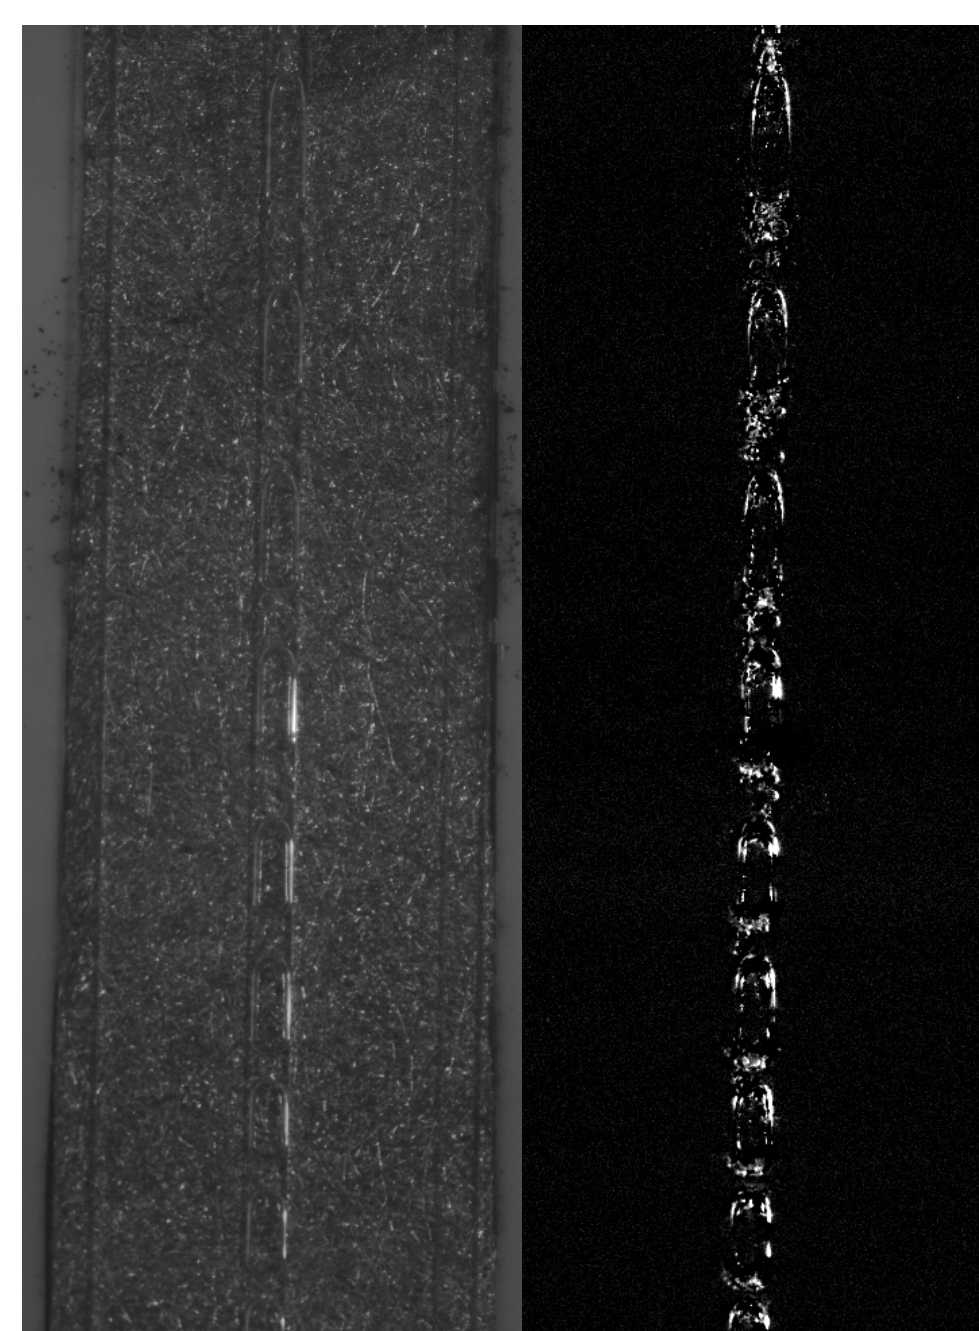


Fig. 5: Taylor flow in the outlet channel. (Current density=2, St.No.=100)

## Results

The following figure shows Taylor bubbles along the outlet channel. In most of the figures shown in this study, there are 4 parallel vertical lines along the outlet channel. The two outer lines are the edges of the channel and the two inner lines are borders of the gas touches the channel wall. Here, about 0.6 mm of the channel width is in touch with the gas. On the other hand it's dry (zero wall film).

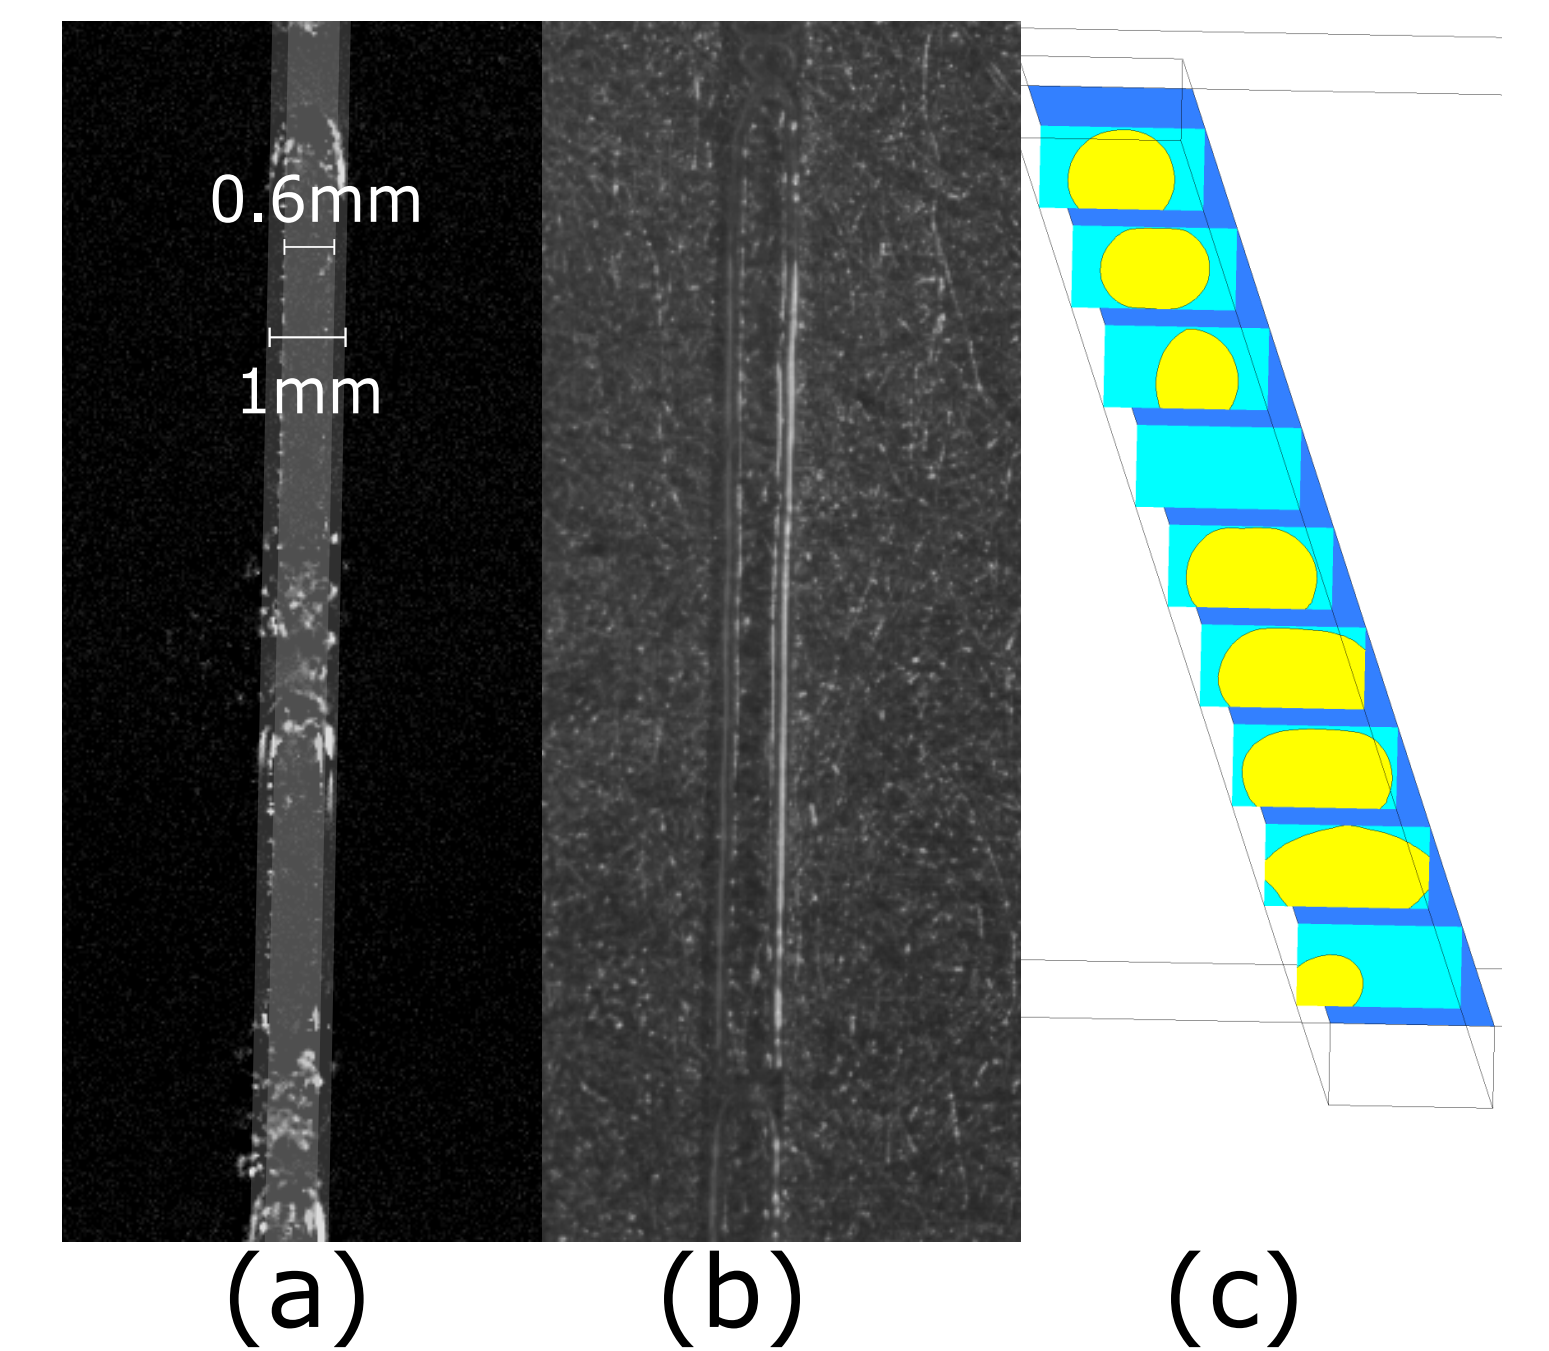


Fig. 6: Taylor bubbles in the outlet channel. About 0.6 mm of the Taylor bubbles are in contact with the micro-channel wall.

The aim of the following figure is to show accumulation of tiny bubbles in the upper section of the Ti-felt.

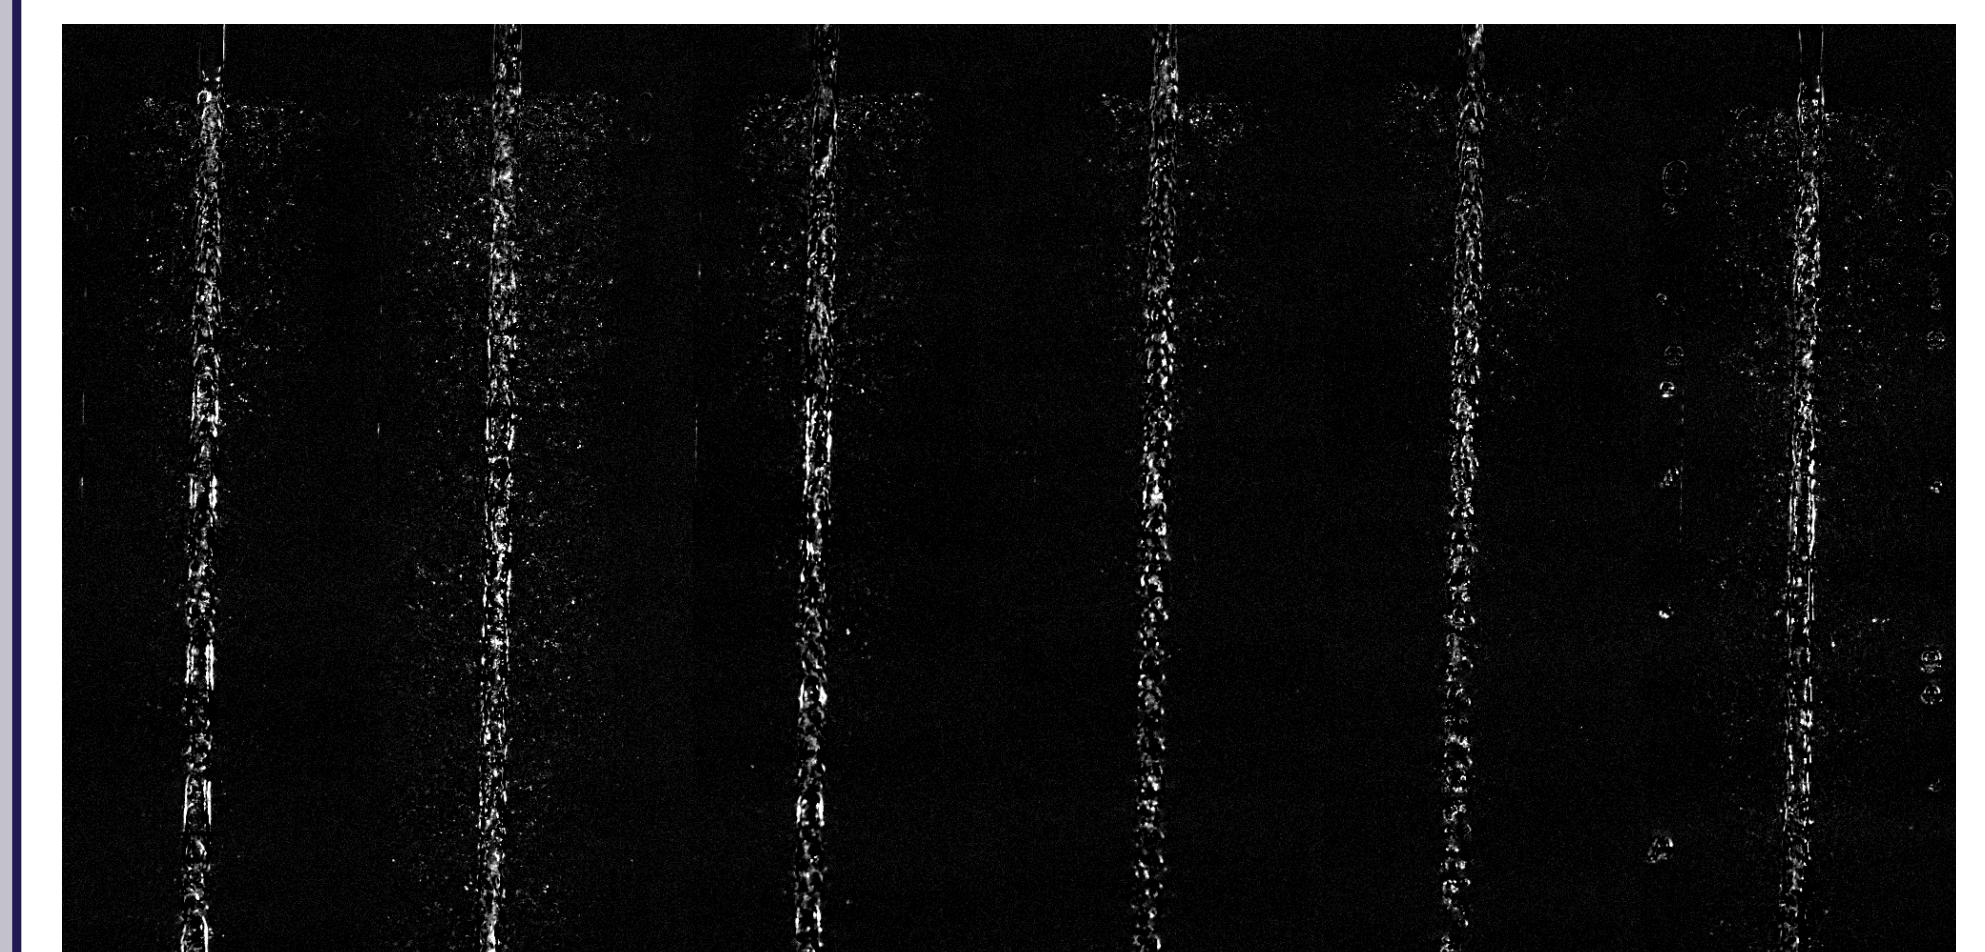


Fig. 7: Accumulation of bubbles in the top section of the Ti-felt in different current densities and stoichiometric numbers.

## Conclusion

Gas—liquid flow in micro-channels of electrolyser independent of the electro-chemical complexities was demonstrated. Different gas-liquid flow regimes was seen by different gas flow that corresponds to the current density and water flow rate was successfully demonstrated using a micro-porous ceramic as a permeable wall.

## Similar papers

- [1] Lafmejani S., Olesen, A., Kær, S.,: VOF modelling of gas—liquid flow in PEM water electrolysis cell micro-channels, Int. J. of Hydrogen Energy, 2017.
- [2] Lafmejani, S., Olesen, A., and Kaer, S.,: Analysing Gas-Liquid Flow in PEM Electrolyser Micro-Channels, ECS Trans., 2016.

LinkedIn page:

